


Smart Interactive Display

MW3586-T-X2

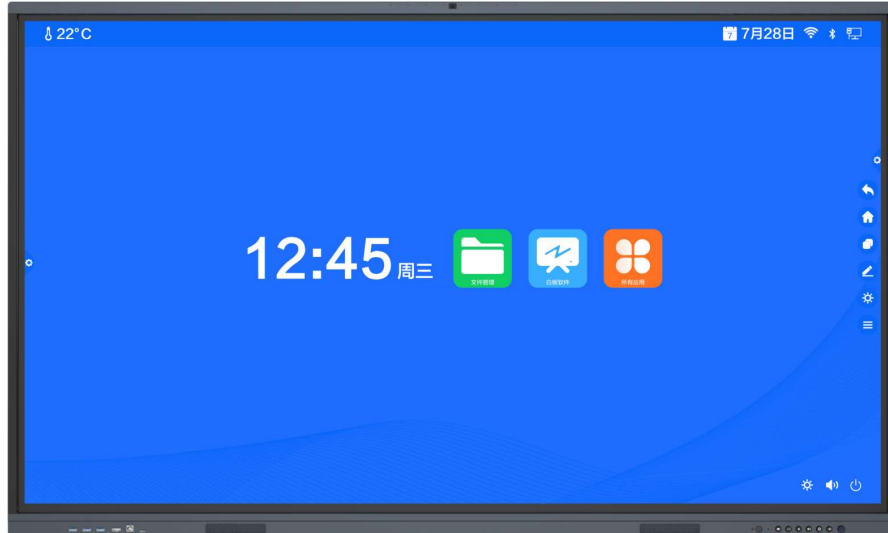

Specifications

Model	MW3586-T-X2
Panel	
Backlight	DLED backlight
Panel size	86 inches
Resolution	3840*2160
Brightness (cd/m ²)	350
Contrast ratio	1200:1
Response time (ms)	8
Color support	1.07 billion colors
Viewing angle (H/V)	178°/178°
Android	
CPU architecture	GK6760V100
CPU operating frequency	Octa-core A55
RAM/ROM	DDR4: 8GB eMMC:128GB
CPU	1.2GHz
System version	Android 14.0
Touch	
Touch control	Contactless IR sensor, supports 40-point touch
Touch precision (mm)	±2

Glass	4mm tempered glass,7H, anti-glare
Response time (ms)	≤8
Input method	Opaque objects (e.g. fingers, pens)
Interface	
Video Input	2 x HDMI IN
Audio Output	1 x Line OUT 1 x Coax OUT
Other Interfaces	2 x Touch USB、 1 x Type C、 5 x USB 2.0、 1 x RS232、 1 x TF card
Rear interface	1 x RJ45, supports 10M/100M Base-T self-adaptive
Audio	
Speaker	2×15W
Channel	2.0
Camera	
Camera	16MP Android: Pixel 8MP for Photos & 2MP for Video Windows: Pixel 16MP for Photos & 16MP for Video
Microphone array	8
Pickup distance	8
NFC	
NFC	Support screen mirroring by Android phones
Wi-Fi	
Configuration	Wi-Fi 5, supports 5G/2.4G
Performance	0~12m distance in open space
Bluetooth	
Version	5.0
Performance	12m transmission distance in open space
OSD	
Language	21 (Simplified Chinese, Traditional Chinese, English, Spanish, Korean, Japanese, Russian, Vietnamese, French, German, Italian, Nederlands, Arabic, Indonesian, Kazakh, Polish, Portuguese, Thai, Ukrainian, Nepali, Turkish)
VESA	
Wall mount hole (mm)	800*400
General	
Power input	AC 100 to 240V, 50/60Hz
Overall power consumption (W)	≤380 (without OPS)
Standby power consumption (W)	<0.5

Operating temperature	0°C to 40°C
Operating humidity	10% to 80% RH, non-condensing
Storage temperature	-20°C to 60°C
Storage humidity	10% to 90% RH, non-condensing
Product dimensions (W*H*D)(mm)	1953.2*1166*115.8mm
Packaging dimensions (W*H*D)(mm)	2060*197*1265mm
Weight (kg)	Net weight: 58 Gross weight: 79
Accessories included	1*power cable, 2* Touch Pen, 1*quick guide, 1* remote control,1* wall mounting bracket, 2 x rod antenna
*Note	*The specifications listed above may vary with device model

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.